

DUCT IN-LINE

In-line mixed flow fans with high performance air flow capacity and low noise level.

EASY
MAINTENANCE

2 SPEED
3 SPEED

DUCT IN LINE 200 STANDAR
IP-44



○ **Fan:**

- Housing polypropylene plastic.
- Easy accessible motor due to the motor support, which can be dismantled without interfering existing duct system. (1)

○ **Motor:**

- Asynchronous 1, 2 and 3 speeds motor, self-lubricating bearings for life.
- Protection **IP44 (IPX2 for DUCT IN-LINE 100/130)** insulation Class B, and thermal cut out, ambient temperature max. 60°C.
- External terminal box.
- 60Hz versions on demand.
- Speed control possible (not timer versions).
- TIMER version models adjustable from 3 to 15 minutes.

○ **Impeller:**

- High performance and very silence helicentrifugal mixed flow, made in ABS plastic.
- **DUCT IN-LINE 100/130** with centrifugal impeller.


○ **Accessories:**

- Fixed plastic grills.


CODE	MODEL	EAN CODE	VERSION	Ø (mm)	Voltage (V)	Speed (r.p.m)	Input Power (W)	Maximum AirFlow (m³/h)	Sound Pressure Level dB(A)	Weight (Kg)	Units per box
STANDARD SERIES											
00770000	DUCT IN-LINE 100/130	8422248920735	●	100	230	2.200	25	130	24	1,2	4
00702000	DUCT IN-LINE 100/270	8422248021203	●	100	230	2.300/1.700	40/18	270/190	30/24	2,1	1
00703000	DUCT IN-LINE 125/320	8422248021227	●	125	230	2.300/1.700	40/18	365/250	32/26	2,1	1
00704000	DUCT IN-LINE 150/560	8422248021241	●	150	230	2.700/2.000	70/60	595/420	33/27	3,2	1
00705000	DUCT IN-LINE 160/560	8422248021265	●	160	230	2.700/2.000	70/60	595/420	33/27	3,2	1
00706000	DUCT IN-LINE 200/910	8422248021289	●	200	230	2.700/2.000/1.800	85/65/55	910/820/720	39/34/32	4,5	1

TIMER SERIES											
00702100	DUCT IN-LINE 100/270 T	8422248021210	●	100	230	2.300/1.700	30/18	270/190	30/24	2,1	1
00701100	DUCT IN-LINE 125/320 T	8422248021234	●	100	230	2.300/1.700	30/18	365/250	32/26	2,1	1

	A	B	C1	C2	D	E	F1	F2	F3	G	H
DUCT IN LINE 100/130	98	171,5	238	71	102,5	80,5	152	171	100	20	120
DUCT IN LINE 100/270	98	232	315	241,6	117	115	168	180	155	25	130
DUCT IN LINE 125/320	122	232	279	241,6	117	115	168	180	155	25	130
DUCT IN LINE 150/560	147	244	293,4	272,4	129	115	192	180	158	21	130
DUCT IN LINE 160/560	157	244	312,6	272,4	129	115	192	180	158	23	130
DUCT IN LINE 200/910	197	278,5	353,6	272,4	138,5	140	211	230	161,5	51,5	142



Duct in Line 100/130

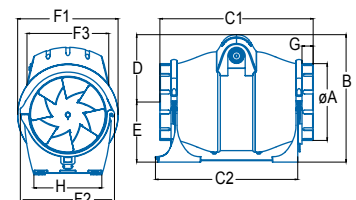

STANDARD In combination with light, fans switches on.



TIMER Electronic timer adjustable from 3 to 15 minutes.

