


E-100 G
E-120 G
E-150 G
E-100 GT
E-120 GT
E-150 GT



CODE	MODEL	COLOR	EAN CODE	VERSION	Ø (mm)	Voltage (V)	SPEED (r.p.m)	Input Power (W)	Maximum Airflow (m³/h)	Sound Pressure Level dB(A)	Weight (Kg)	Units per box
HYGRO SERIES												
00900200	E-100 GTH	□	8422248049634	●●	100	230	1ª vel 1100 2ª vel 2600	4 8	36 115	17 31	0,98	6
00901200	E-120 GTH	□	8422248056823	●●	120	230	1ª vel 900 2ª vel 2400	6 11	140 210	19 33	1,17	6
00902200	E-150 GTH	□	8422248056854	●●	150	230	1ª vel 900 2ª vel 2400	10 19	225 350	23 35	1,45	6
00900600	E-100 GSTH	■	8422248056076	●●	100	230	1ª vel 1100 2ª vel 2600	4 8	36 115	17 31	0,98	6
00900602	E-100 GTH BK	■	8422248071895	●●	100	230	1ª vel 1100 2ª vel 2600	4 8	36 115	17 31	0,98	6
TIMER SERIES												
00900100	E-100 GT	□	8422248049627	●	100	230	2600	8	115	31	0,95	6
00901100	E-120 GT	□	8422248056816	●	120	230	2400	15	210	33	1,10	6
00902100	E-150 GT	□	8422248056847	●	150	230	2200	21	350	35	1,39	6
00900500	E-100 GST	■	8422248056069	●	100	230	2600	8	115	31	0,95	6
00900502	E-100 GT BK	■	8422248071888	●	100	230	2600	8	115	31	0,95	6
00900001	E-100 GLT	□	8422248056786	●	100	230	2600	8+4	115	31	1,115	6
STANDARD SERIES												
00900000	E-100 G	□	8422248049610	●	100	230	2600	8	115	31	0,94	6
00900400	E-100 GS	■	8422248056052	●	100	230	2600	8	115	31	0,94	6
00900402	E-100 G BK	■	8422248071871	●	100	230	2600	8	115	31	0,94	6
00901000	E-120 G	□	8422248056809	●	120	230	2400	15	210	33	1,10	6
00902000	E-150 G	□	8422248056830	●	150	230	2200	21	350	35	1,38	6
PIR SERIES												
00900300	E-100 SENSOR	□	8422248065184	●	100	230	2600	8	115	31	1,115	6

DIMENSIONS mm

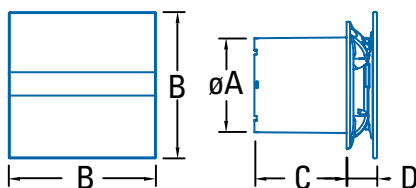

	Ø A	B	C	D
E GLASS-100	98	150	94	28,5
E GLASS-120	118	170	94	35
E GLASS-150	148	190	94	45
E GLASS-100 LIGHT/PIR	98	150	94	35



STANDARD In combination with light, fans switches on.






TIMER Electronic timer adjustable from 3 to 15 minutes.



HYGRO Adjustable humidity detector from 40% to 95%, and adjustable electronic timer from 0 to 15 minutes.



PIR Infra red sensor activated by presence and adjustable electronic timer from 40 seconds to 15 minutes.

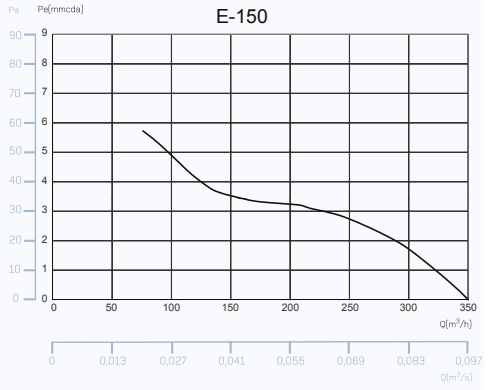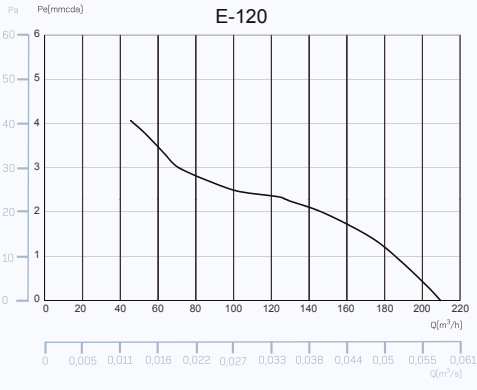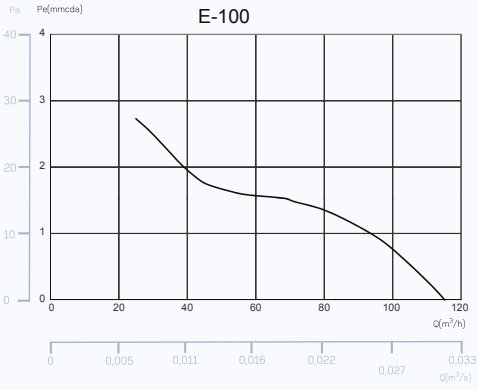

0