

LHV

Helicoidal fans to be installed in walls or windows.

- ⊙ Modern design.
- ⊙ Impeller with **low noise profile and high efficiency**.
- ⊙ **Window kit included.**
- ⊙ Protection guard on inlet side.
- ⊙ Series with 230 V, 50 motor, protection IP-44, insulation class B (type 160 IP-X4).
- ⊙ 60Hz versions on demand.
- ⊙ Speed controlled.
- ⊙ Working temperature from: -20°C to +50°C.



Ø 400

Ø 350



Ø 300


Ø 225

Ø 190

Ø 160


CODE	MODEL	COLOUR	EAN CODE	VERSION	Ø (mm)	Voltage (V)	Speed (r.p.m)	Input Power (W)	Maximum AirFlow (m³/h)	Sound Pressure Level dB(A)	Weight (Kg)	Units per box
00660000	LHV 160		8422248009324		160	230	1750	20	450	40	1,2	1
00661000	LHV 190		8422248009331		190	230	1500	30	700	42	1,7	1
00662000	LHV 225		8422248009348		225	230	1150	45	900	44	3	1
00663000	LHV 300		8422248009355		300	230	1050	50	1450	47	3,4	1
00664000	LHV 350		8422248009362		350	230	1300	100	1850	52	4,3	1
00665000	LHV 400		8422248009379		400	230	1400	215	3150	55	7,4	1

MEDIDAS mm

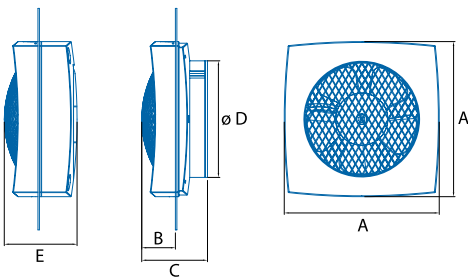

	A	B	C	Ø D	E
LHV 160	210	46	89	160	99
LHV 190	250	54	97	194	109
LHV 225	285	61	110	229	123
LHV 300	370	77	125	315	144
LHV 350	430	85	142	365	159
LHV 400	490	95	160	415	181

LHV 160 / LHV 190 / LHV 225 / LHV 300

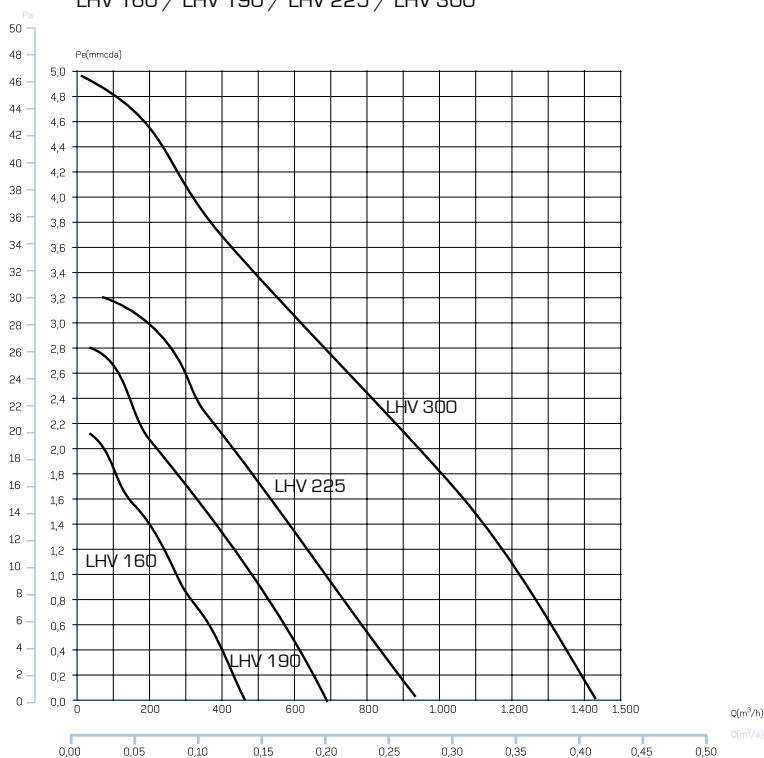

LHV 350 / LHV 400

