

B-PLUS

Axial fans for bathrooms, very slim, to be installed in ceiling or wall.


SLIM



- Very slim, recessed design.
- Plastic housing and impeller.
- 220-240V 50/60Hz motors, insulation class B and thermal cut out, ambient temperature max. 40°C.
- Pilot light in HUMIDISTAT version and B15 PLUS models.

CODE	MODEL	COLOUR	EAN CODE	VERSION	Ø (mm)	Voltage (V)	Speed (r.p.m)	Input Power (W)	Maximum AirFlow (m³/h)	Sound Pressure Level dB(A)	Weight (Kg)	Units per box
HYGRO SERIES												
00981401	B10 PLUS H	<input type="checkbox"/>	8422248050876	●	100	230	2500	15	98	41	0,6	10
TIMER SERIES												
00981101	B10 PLUS T	<input type="checkbox"/>	8422248049566	●	100	230	2500	15	98	41	0,6	10
00982100	B12 PLUS T	<input type="checkbox"/>	8422248113489	●	120	230	2450	20	190	43	0,8	5
00983100	B15 PLUS T	<input type="checkbox"/>	8422248114257	●	150	230	2100	28	320	43	0,9	5
STANDARD SERIES												
00990000	B8 PLUS	<input type="checkbox"/>	8422248113168	●	90	230	2500	15	70	39	0,57	10
00281000	STOCK B10 PLUS	<input type="checkbox"/>	8422248047210	●	100	230	2500	15	98	41	0,6	10
00282000	STOCK B12 PLUS	<input type="checkbox"/>	8422248053969	●	120	230	2450	20	190	43	0,8	5
00283000	STOCK B15 PLUS	<input type="checkbox"/>	8422248047227	●	150	230	2100	28	320	43	0,9	5
00981001	SPECIAL B10 PLUS	<input type="checkbox"/>	8422248047906	●	100	230	2500	15	98	41	0,6	10
00982000	SPECIAL B12 PLUS	<input type="checkbox"/>	8422248113472	●	120	230	2450	20	190	43	0,8	5
00983000	SPECIAL B15 PLUS	<input type="checkbox"/>	8422248114226	●	150	230	2100	28	320	43	0,9	5

DIMENSIONS mm

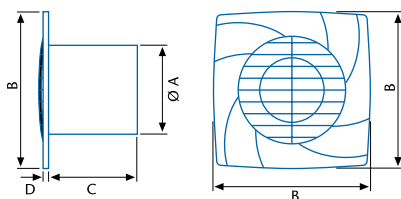

	Ø A	B	C	D
B - 8 PLUS	86	140	88	10
B - 10 PLUS	98	140	85	10
B - 12 PLUS	118	170	100	13
B - 15 PLUS	148	190	112	15



STANDARD In combination with light, fans switches on.



TIMER Electronic timer adjustable from 3 to 15 minutes.

